




YOUR BEST DISINFECTION PLAYER

UV-DIRECT supports **deep surface disinfection in any type of environment.**

In just a few minutes of operation, UV-DIRECT fixtures can create high levels of disinfection otherwise achieved with hazardous, harmful, and expensive chemicals.

The UV-DIRECT should be used in the absence of people and can be easily integrated into building controls and scheduled routines.

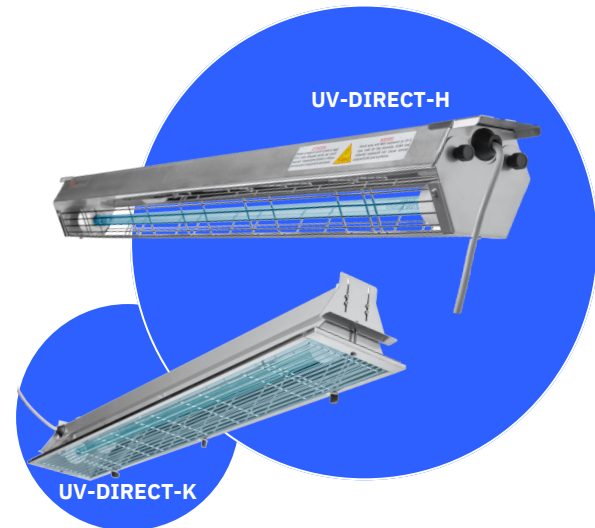

KEY PRODUCT FEATURES

- **Fit Anywhere**, compact form factors, many sizes and wattage strengths available.
- **Increased Disinfection Performance**, with High-Output UV-C lamps (253,7 nm) and internal mirror bright aluminum reflector.
- **Built to Last**, in high-quality Stainless Steel AISI 304, all material tested for UV resistance.
- **Protected**, resistant to dust and splashes with an IP55 Rating.
- **Integrate and Monitor**, your operation with lamp failure alarm signals (“-EL” models).
- **Advanced Management**, with optional control board available for multiple lamp fixtures.

UV-DIRECT-H



UV-DIRECT-K



HEALTHCARE



HVAC



PROCESS
INDUSTRY



HOSPITALITY



SHARED
SPACES



PUBLIC
VENUES



WELLNESS
CENTERS



TRANSPORT

TECHNICAL TABLE

| | UV-DIRECT-H-H-NX | | UV-DIRECT-H-K-NX | |
|-----------------------|---|--------------------------------------|---------------------------------------|--|
| | UVDRCT40HHNX | UVDRCT90HHNX | UVDRCT40HKNX | UVDRCT90HKNX |
| LAMP LIFE (hours)* | ≤ 18.000 | | | |
| REPLACEMENT LAMP | n°1 CHS-40WHF | n°1 CHS-90WHF | n°1 CHS-40WHF | n°1 CHS-90WHF |
| LAMP POWER (W) | 40 | 90 | 40 | 90 |
| DIMENSIONS l x p x h | 530 x 88 x 109 mm (21 x 3 x 4 in) | 986 x 88 x 109 mm (39 x 3 x 4 in) | 598 x 103 x 156 mm (23 x 4 x 6 in) | 1055 x 103 x 156 mm (42 x 4 x 6 in) |
| INSTALLATION | Wall or Ceiling (Bracket included) | | Recessed Ceiling (Bracket included) | |
| WEIGHT | 2 Kg 4 Lb | 4 Kg 9 Lb | 2 Kg 4 Lb | 3.5 Kg Lb |
| TREATED VOLUME | 20 ÷ 40 m³ 706 ÷ 1413 ft³ | 40 ÷ 65 m³ 1413 ÷ 2296 ft³ | 20 ÷ 40 m³ 706 ÷ 1413 ft³ | 40 ÷ 65 m³ 1413 ÷ 2296 ft³ |
| TREATED SURFACE | 7 ÷ 13 m² 75 ÷ 134 ft² | 14 ÷ 25 m² 151 ÷ 270 ft² | 7 ÷ 13 m² 75 ÷ 140 ft² | 14 ÷ 25 m² 151 ÷ 270 ft² |
| PROTECTION RATING | IP 55 | | | |
| POWER SUPPLY | On-board power supply always included. Optional Control Board for the management of multiple lamps. | | | |
| ELECTRICAL CONNECTION | Power supply cable 3x1mm², 2,5m length | | | |
| ALARM VERSION | cod. UVDRCTEL40HHNX | cod. UVDRCTEL90HHNX | cod. UVDRCTEL40HKNX | cod. UVDRCTEL90HKNX |
| ELECTRICAL CONNECTION | EL Version: model with alarm signal (+LED): cable 7x1mm², 2,5m length | | | |

* continuous operation

TROUBLE-FREE INTEGRATION AND INSTALLATION



- We provide the optimal point of integration for every product without requiring changes to your system.
- Mounting and powering the device can be done without complex requirements.
- Ongoing maintenance only takes a few minutes to replace lamps when necessary.

SOFTWARE ENGINEERED DISINFECTION

From our in-depth know-how on the subject and with our proprietary dosage calculation software we can simulate device performance and validate effectiveness in every application.

[Calculation Software](#)




TECHNICAL DRAWINGS

Every Light Progress Product is available in detailed DWG and STEP files for your design-in and specification clarity.

[VIEW or DOWNLOAD now](#)



MICROBIAL TESTS AND EFFICACY

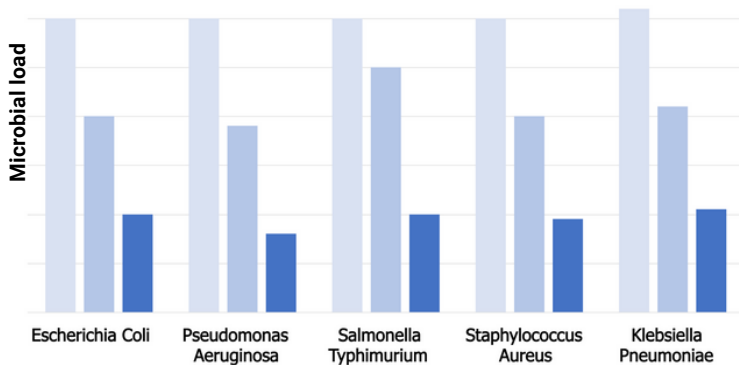

Up-to log₆ microbial reduction with a 10 minutes treatment, at 3.5 mt from target Surface

Light Progress customers rely on our extensive history of third party testing and proven efficacy to meet any level of disinfection validated against literally any virus or microorganism.

- 4 min.
- 7 min.
- 10 min.

We understand your need to meet Regulatory Requirements and Industrial Standards as we help you achieve microbial load reduction using our UV systems.

Light Progress Group SRL
Anghiari (AR) ITALIA
P: (+39) 0575 749255
E: info@lightprogress.it
W: www.lightprogress.it

Light Progress GmbH
Aschaffenburg DEUTSCHLAND
P: (+49) 6021-8663700
E: info@lightprogress.it
W: www.lightprogress.de

Light Progress LLC
Austin, TX USA
P: (+1) 833-882-4255
E: americas@lightprogress.it
W: www.lightprogress.us

OFFICIALLY DISTRIBUTED BY: