




SAFE KITCHENS AND COMFORTABLE DINING

The air filtered by UV-STYLO-S during normal cooking, reduces the formation and deposits of fat and the consequent risk of fires, limiting also the growth of molds that feed usually on fats.

UV-STYLO-S reduces the need of aspiration system cleaning and maintenance, extend filters' life but, more importantly, offers the **possibility to work safely.**

In long ducts, install Ozone lamps to maximize UV-C performances.

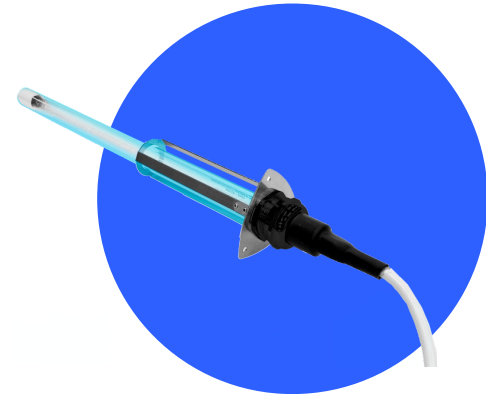

KEY PRODUCT FEATURES

- **Ideal for Retrofit**, modules with Flange, easy to install in any ductwork, with many sizes and wattages available.
- **Increased Disinfection Performance**, with High-Output UV-C lamps (253,7 nm) or Ozone lamps.
- **Built to last**, with high-quality Stainless Steel AISI 304, high temperatures resistance (up to 50 °C), as well as endurance to fats and oils.
- **Protected and Safe**, IP40 Rating and optional differential pressure switch for aspiration control for automatic switch OFF (PRESS-205A).
- **Optimized Efficacy with TiOx® filter**, which contributes significantly to the deodorizing action of UV-C.
- Optional control board available for **advanced management** of multiple devices.



HEALTHCARE



HVAC



PROCESS
INDUSTRY



HOSPITALITY



SHARED
SPACES



PUBLIC
VENUES



WELLNESS
CENTERS



TRANSPORT

TECHNICAL TABLE

	UV-STYLO-S					
	UVSTYLOS11	UVSTYLOS16	UVSTYLOS40H	UVSTYLOS60H	UVSTYLOS90H	UVSTYLOS120H
LAMP LIFE (hours)*	≤ 18.000					
REPLACEMENT LAMP	GH2-11W-QS	GH3-16W-QS	GH4-40WH-QS	GH6-60WH-QS	GH9-90WH-QS	GH11-120WHQS
OZONE VERSION	/	/	UVSTYLOS40HOz	UVSTYLOS60HOz	UVSTYLOS90HOz	/
OZONE LAMP LIFE (hours)*	≤ 12.000					
OZONE REPLACEMENT LAMP	/	/	GH440WHQSOz	GH660WHQSOz	GH990WHQSOz	/
LAMP POWER (W)	11	16	40	60	90	120
FLANGE DIMENSION	77x75 L=150mm (3x3 L=6 in)					
HANDLE	D=47 L=100 mm (D=2 L=4 in)					
LAMP SHOULDER	196mm (8 in)	272 mm (11 in)	397 mm (16 in)	541 mm (21 in)	851 mm (34 in)	1132 mm (45 in)
WEIGHT	0.30 Kg 0.7 Lb	0.40 Kg 0.8 Lb	0.70 Kg 1.5 Lb	0.75 Kg 1.7 Lb	0.80 Kg 1.8 Lb	1,00 Kg 2.2 Lb
MAX AIR FLOW TO BE TREATED (**)	80 m³/h 2.800 ft³/h	120 m³/h 4.200 ft³/h	280 m³/h 9.900 ft³/h	450 m³/h 15.600 ft³/h	600 m³/h 21.200 ft³/h	750 m³/h 26.500 ft³/h
PROTECTION RATING	IP 40					
POWER SUPPLY	4 Options available, including Control Board for the management of multiple lamps, with power supply, access security, hour counter, UV lamp fault control and LED synoptic.					
ELECTRICAL CONNECTION	Power supply cable (4x1 mm²), lenght 0,3 m, with quick-fit plug/socket system (IP55). Extension cable can be purchased separately(J-Cable-10-STY).					

* continuous operation

** at air speed of 2,5 m/s (8.2 fps)

TROUBLE-FREE INTEGRATION AND INSTALLATION



- We provide the optimal point of integration for every product without requiring changes to your system.
- Mounting and powering the device can be done without complex requirements.
- Ongoing maintenance only takes a few minutes to replace lamps when necessary.


TECHNICAL DRAWINGS

Every Light Progress Product is available in detailed DWG and STEP files for your design-in and specification clarity.

VIEW or DOWNLOAD now



TESTED EFFECTIVENESS OF UV-C IN GREASE REDUCTION

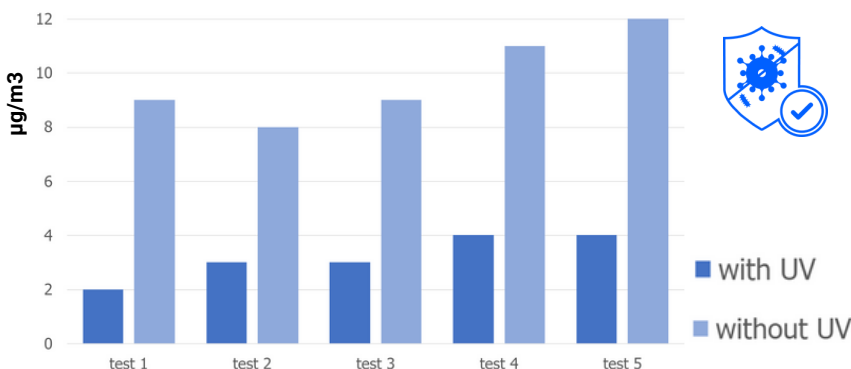

Light Progress customers rely on our extensive history of third party testing and proven efficacy to meet any level of disinfection validated against literally any virus or microorganism.

After taking samplings from a frying station determine the amount of grease in kitchen air.

Thanks to our systems, in every sample we took the amount of grease particles was consistently reduced.

Light Progress Group SRL
Anghiari (AR) ITALIA
P: (+39) 0575 749255
E: info@lightprogress.it
W: www.lightprogress.it

Light Progress GmbH
Aschaffenburg DEUTSCHLAND
P: (+49) 6021-8663700
E: info@lightprogress.it
W: www.lightprogress.de

Light Progress LLC
Austin, TX USA
P: (+1) 833-882-4255
E: americas@lightprogress.it
W: www.lightprogress.us

OFFICIALLY DISTRIBUTED BY: